


KN V-serie galvaniseret kølebeholder

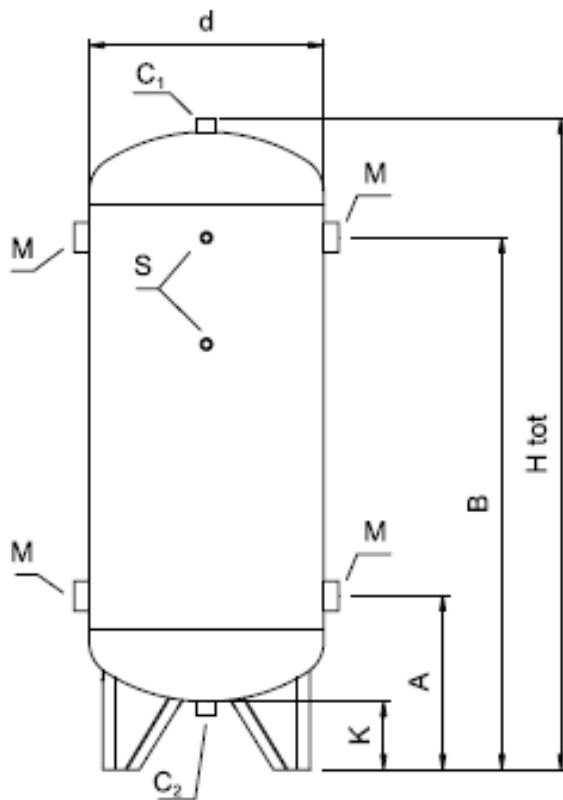

Pos.	Description
M	Water inlet/outlet
C ₁	Pressure relief valve
C ₂	Drain
S	Control instruments

Specifications:

- Chilled water tank, hot-dip galvanized both internally and externally.
- Max working pressure: 6 bar.

Capacity	Tank dimensions					Fitting diameter		
	d	Htot	A	B	K	C	M	S
(lt.)	(mm)					(inches)		
100	400	965	300	760	125	1" 1/4	1" 1/2	1/2"
200	450	1375	325	1165	135	1" 1/4	1" 1/2	1/2"
300	550	1425	365	1165	130	1" 1/4	2"	1/2"
500	650	1710	385	1435	135	1" 1/4	3"	1/2"
750	790	1741	395	1445	125	1" 1/2	3"	1/2"
1000	850	2025	410	1710	120	1" 1/2	3"	1/2"
1500	1000	2163	500	1800	165	2"	3"	1/2"
2000	1100	2480	505	2105	155	2"	3"	1/2"
2500	1200	2575	555	2155	175	2"	4"	1/2"
3000	1250	2770	560	2360	175	2"	4"	1/2"
4000	1400	2865	590	2390	160	2"	4"	1/2"
5000	1600	2900	600	2400	140	2"	4"	1/2"

Ved forespørgsel kan ekstra muffe/studser tilkøbes



Beholderfabrik & Miljøteknik A/S
- komplet leverandør til industri, service & landbrug